







Use of the self-belay

How to carry the self-belays when not in use

The scaffolds of the self-belay are placed into the lateral tool loops.









Use of the self-belay





Correct positioning of the scaffolds during vertical ascend





Use of the self-belay






During vertical ascend the scaffold are alternately attached to the object





Use of the self-belay

Schematic description of the correct application of the self-belay

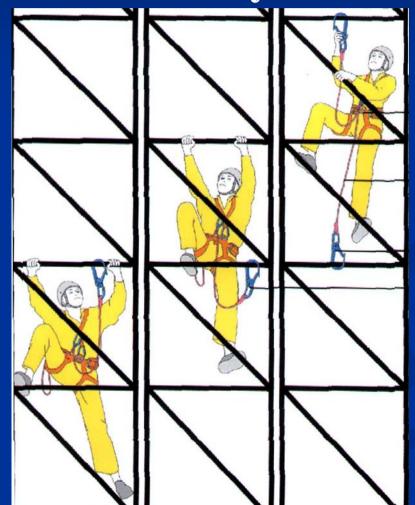





Use of the self-belay

Positioning of the scaffolds during work; e.g. while fixing an intermediate belay.







Wrong use of the self-belay



Do not fasten free scaffolds at the body.



Do not let the scaffolds slip





Wrong use of the self-belay





Not like that





Wrong use of the self-belay







Attention! Load on the scaffold





Wrong use of the self-belay



Never prolong self-belays !!!